

GENERAL REPAIR

Complete Your Shop With Coats®
Equipment

COATS

2 POST
4TV21NSR1 / 4TV21NXR1 / 4TP21NSR1
/ 4TP21NXR1

COMMERCIAL GRADE AUTOMOTIVE SERVICE LIFTS

2 POST PREMIUM "2N1" STYLE 10,000 LB. / 4.5T CAPACITY

3 Piece Front & Rear Arms



#4TV21NSR1

2 FIELD ADJUSTABLE
HEIGHT SETTINGS


"2N1" DOUBLE SCREW
ADJUSTABLE ARM PAD
LIFT SYSTEM



4 1/8" (105MM) CONTACT AREA WITH HD
STEEL SADDLE BASE. NICKEL PLATED TO
PREVENT COROSION

"Two in One" Arm Design

Easy access to approved lift points
with 3 piece offset front and extended
rear arms for asymmetric or symmetric
loading

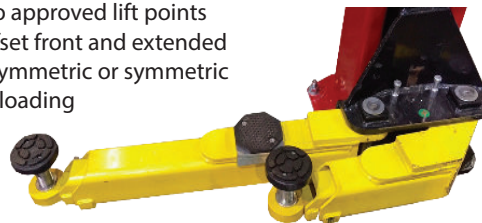

STANDARD WITH LIFT



3" & 6" (76.2 & 152.4mm) Set of 4

Nickel plated Height Adapters #4T2PTA4-2



Complete Set

Honda sliding arm adapters #4T2PHA

OPTIONAL ACCESSORIES



Set of 2

GM Truck 7" (177.8mm) Pads #4TGMTA



Set of 4

TESLA S&X adapters # 4T2PMD5-X



Set of 4

TESLA 3 adapters #4T2PMD3

2N1 10,000 LB. / 4.5T CAPACITY

To learn more about the 10K 2n1, or any of
our other quality products, contact your
authorized Coats distributor or call 1-855-
876-3864 for the dealer nearest you.



CONTACT US NOW

www.coatsgarage.com
or call 1-855-876-3864

2N1 10,000 LB. / 4.5T CAPACITY
LEGENDARY RELIABILITY WITH STATE OF
THE ART CAPABILITY.

4TV21NSR1/4TV21NXR1
4TP21NSR1/4TP21NXR1

OUR GOAL IS TO BUILD LIFTS THAT LAST LONGER, PERFORM BETTER AND COST LESS TO OPERATE

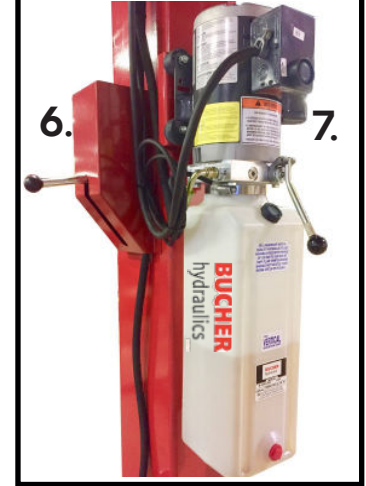

3/8" / 9.5mm pre-stressed cables with 3-1/2" / 89mm steel pulleys

2.5" x 1.5" (63mm x 38mm) inner column reinforcement tube

Reinforced carriage arm pin holes - plated gear style arm restraints



11" x 2" / 279 x 51mm carriage mounted rubber door bumper guards

FEATURES	
	Premium bake Powder coat finish
1.	3 1/2"/89mm Steel Pulleys & 3/8"/9.5mm IWRC 6 x 36 cables
2.	Columns 1 1/2" x 2 1/2" / 51 x 64mm inner tube support
3.	Reinforced carriage Arms pin holes
4.	Replaceable plated gear style arm restraints
5.	Carriage mounted rubber door bumper guards
6.	Single point release - controls can be on either column
7.	Premium US Made Bucher Power Unit
	70 1/2" / 1791mm stroke cylinders
	Field adjustable height setting
	Rubber power unit motor mounts
	3 piece retractable arms front & rear

BENEFITS	
	Protects against structural corrosion
1.	Last longer with less maintenance
2.	Up to 18% heavier columns flex less under load
3.	Carriage & lift arms last longer with less sag
4.	Last longer with lower maintenance cost
5.	Protects customer cars from door damage
6.	Greater flexibility for the operator
7.	Lasts longer with Less maintenance
	Lifts higher for more under car working height
	Lower installation cost more flexibility
	Motor lasts longer and runs quieter
	Provides greater access to approved lift points

Energy efficient US Made Bucher 2HP / 1.5kw power unit typically lasts the life of the lift - single point lock release - rubber motor mounts

EQUIPMENT FOOTPRINT

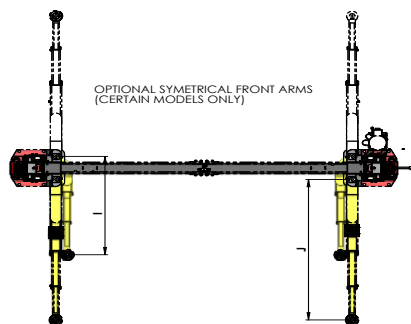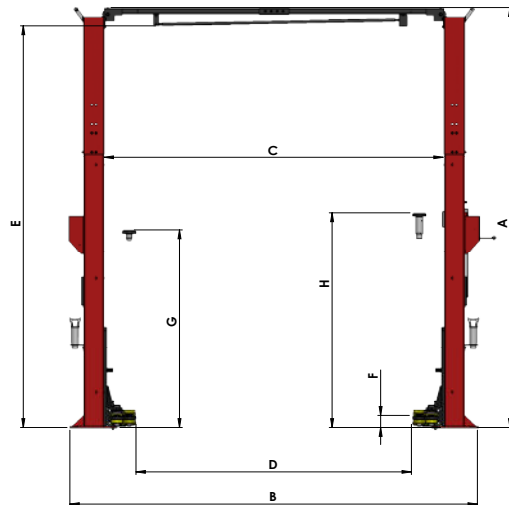

ADDITIONAL FEATURES

SPECIFICATIONS		
	CAPACITY	10,000 lb. / 4.5T
A	Overall Height (Field Adjustable)	138" or 148" / 3505mm or 3759mm
B	Overall Width	135-1/2" / 3429mm
C	Width Between Columns	112-3/4" / 2845mm
D	Drive Thru Width	92" / 2337mm - symmertric 100" / 2540mm
E	Under Bar Clearance (Field Asjustable)	131" or 141" / 3327mm or 3581mm
F	Height to Lowered Lift Pad	4.5" / 110.3mm
G	Raised Height with Standard Pad	76" / 1930mm
H	Raise Height with Adapters	87" / 2210mm
I	Front Arm Reach	18" to 44" / 457mm to 1124mm - Symmetric 33" to 62" / 838mm to 1575mm
J	Rear Arm Reach	33" to 62" / 838mm to 1575mm
	First Lock Position from Floor	11 1/2" / 292mm
	Lifting Time	55 seconds
	Standard Power Requirements	230 Volts - 50/60 Hz - 1 PH - 20amp
	Shipping Weight	1,980 lbs. / 900 kg.
	Model: 4TV21NSR1	2 N 1 Standard
	Model: 4TV21NXR1	Extended Heigth
	Model: 4TP21NSR1	Premium 2 n1
	Model: 4TP21NXR1	Premium Extended



www.coatsgarage.com

Part No. MKT00189 Spec 2021 Rev.2
© 2021 Hennessy Industries, Inc.

1601 J.P. Hennessy Drive, LaVergne, TN 37086 (800) 688-6496 or (615) 641-7533
Hennessy Canada: 2430 Lucknow Drive, Unit 9, Mississauga, Ontario L5S 1V3 (905)