

GENERAL REPAIR

Complete Your Shop With Coats®
Equipment

COATS

4T216SSR1
4T220SSR1

HEAVY DUTY 2 POST TRUCK & VAN LIFTS

16,000 OR 20,000 LB. (7.3 OR 9
TON CAPACITY

HEAVY DUTY SINGLE PIECE COLUMNS & LONG
TWO PIECE 62" / 1575MM LONG ARMS ARE



#4T216SSR1
#4T220SSR1




Large irregular shaped base plate 17" x 31"
(432 x 787mm) & 1" (25.4mm) thick creates
greater stability with less floor stress



Heavy duty symmetric model pro-
vides easy access to most approved
lift points with 2 piece adjustable
front and rear arms and low 4" or 5
1/2" / 102 or 127mm drive over con-
tact adapters


May2021

STANDARD WITH LIFT

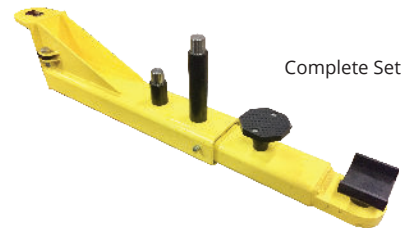

Complete Set

16,000 lb. / 7.3T Lift with 4" / 102mm Pad
Height for Cars & Light Trucks - Drop in
Stacking Adapters



Complete Set

20,000 lb. / 9.1T Lift with 5" /
127mm Pad Height for Light and
Medium Trucks - Screw in Style Saddle Adapters

OPTIONS



Standard 199 1/2" tall structure can be made
shorter to fit your ceiling requirements



Air station air/electric power supply 4TAES

2 POST LIFT 16 & 20,000 LB. / 7.3 & 9T CAPACITY

To learn more about the 16/20,000 lb. 2
post , or any of our other quality products,
contact your authorized Coats distributor
or call 1-855-876-3864 for the dealer
nearest you.

CONTACT US NOW

www.coatsgarage.com
or call 1-855-876-3864



HEAVY DUTY 16 & 20,000 LB. / 7.3 & 9.0T CAPACITY
LEGENDARY RELIABILITY WITH STATE OF THE ART CAPABILITY.

4T216SSR1
4T220SSR1


OUR GOAL IS TO BUILD LIFTS THAT LAST LONGER, PERFORM BETTER AND COST LESS TO OPERATE



1. Formed box shaped columns 15" x 9" / 381 x 230mm can be shorter for lower ceilings




2. 3/8" / 9.5mm pre-stressed cables with 5" / 127mm steel pulleys

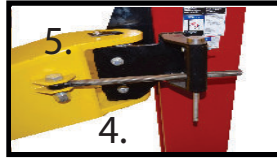

4. Plated heavy duty arm restraints with non sag 2 piece arms



6. Air release locking system with regulator, filter oiler

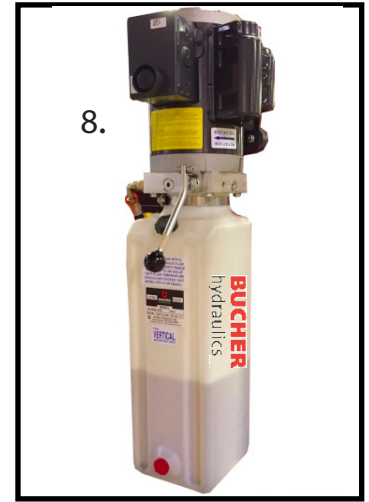


8.

Energy efficient premium US Made Bucher 4HP / 13kw power unit typically lasts the life of the lift - single point air lock release

FEATURES	
1.	Premium bake Powder coat finish
2.	5"/127mm Steel Pulleys & 3/8"/9.5mm IWRC 6 x 36 cables
3.	1 piece 199 1/2" / 5067mm column can be ordered shorter
4.	Replaceable plated heavy duty arm restraints
5.	Heavy duty 2 piece non sag adjustable arms
6.	Air release single point locking
7.	Standard air regulator filter
8.	Premium US Made Bucher 4Hp / 3kw Power Unit
	72" / 1829mm stroke cylinders raises 87 1/2" 2172mm
	120 1/2" / 3061mm space between columns
	Large irregular shaped base 17" x 31" / 432x 787mm
	Low arm pad drive over height 4" or 5" / 102 or 127mm

BENEFITS	
1.	Protects against structural corrosion
2.	Last longer with less maintenance
3.	More flexibility & lower installation costs
4.	Last longer with lower maintenance
5.	More stable with heavy or uneven loads
6.	Lasts longer with less maintenance
7.	Reduces maintenance with air system
8.	Lasts longer with Less maintenance
	Lifts higher for more under car working height
	More flexibility with larger trucks
	Greater stability
	Provides greater access with lower vehicles

EQUIPMENT FOOTPRINT

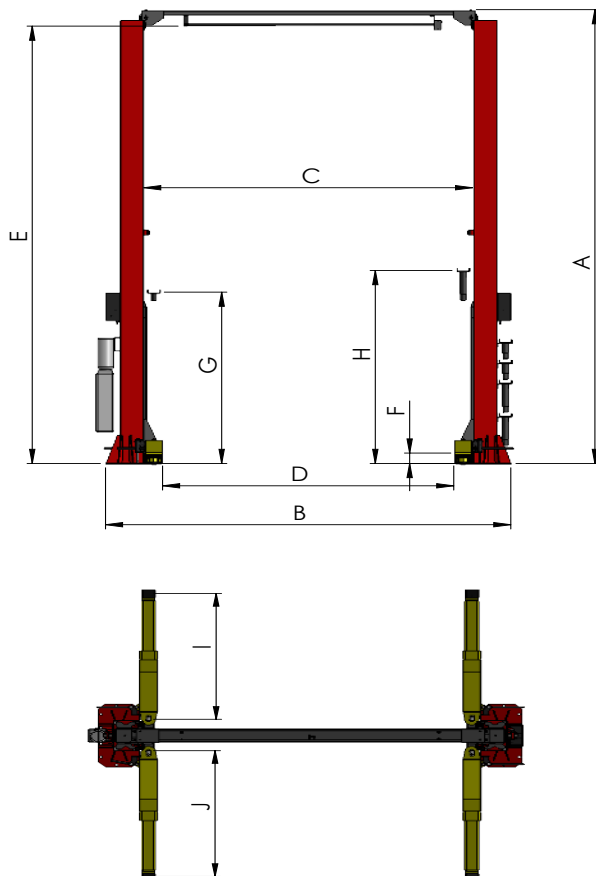

SPECIFICATIONS

SPECIFICATIONS		16,000 LB.(7.3T)	20,000 LB. (9 T)
A	Overall Height	199 1/2" (5067mm)	
B	Overall Width	152" (3861mm)	
C	Width Between Columns	120 1/2" (3061mm)	
D	Drive Thru Width	106 3/4" (2711mm)	
E	Under Bar Clearance	192 1/2" (4890mm)	
F	Height to Lowered Lift Pad	4" / 102 mm	5" (127mm)
G	Raised Height with Standard Pad	76" / 1930 mm	
H	Raise Height with Adapters	87 1/2" (2222mm)	85 1/2" (21272mm)
I	Front Arm Reach	34" to 62" (864mm to 1575mm)	
J	Rear Arm Reach	34" to 62" (864mm to 1575mm)	
	Lifting Time	75 seconds	
	Standard Power Requirements	230 Volts - 60 Hz - 1PH - 20 Amp 4HP / 2 kw motor	
	ALI Certified with Gold Label	Yes	
	Shipping Weight	3,350 lb. (1520 kg).	3,850 lb. (1750 kg.)
	Model Number	4T216SSR1	4T220SSR1

COATS®

www.coatsgarage.com

Part No. MKT00189 Spec 05/28/21
 Hennessy Industries, Inc.

1601 J.P. Hennessy Drive, LaVergne, TN 37086 (800) 688-6496 or (615) 641-7533
 Hennessy Canada: 2430 Lucknow Drive, Unit 9, Mississauga, Ontario L5S 1V3 (905)