

GENERAL REPAIR

Complete Your Shop With
Coats® Equipment

coats

4 POST
4T415CSAR1 / 4T415CXAR1

"OPEN FRONT" 4 POST

WHEEL ALIGNMENT 15,000 LB.
/ 6.8T CAPACITY




OPEN FRONT



4T415OSAR1/OXAR1

THE ONLY 4 POST WITH ADJUSTABLE FRONT
BEARINGS "CAMBER NEUTRAL" TECHNOLOGY

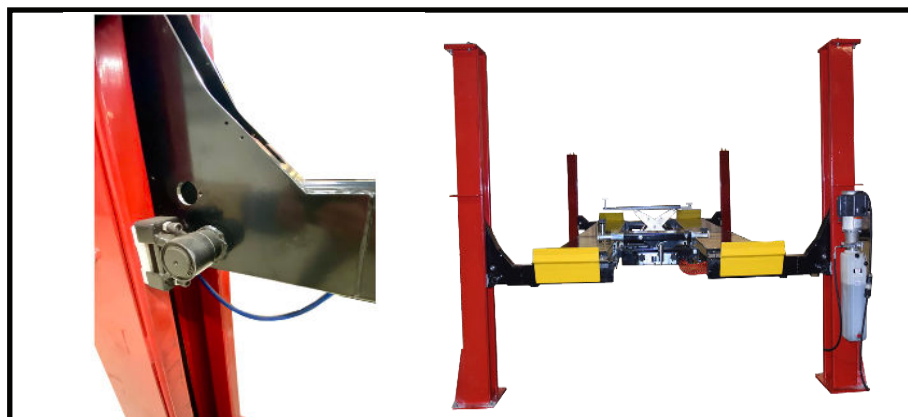


HEAVY DUTY 4 POST IDEAL FOR ALL GENERAL
SERVICE ON CARS & LIGHT TRUCKS


OPTIONAL ACCESSORIES



Heavy duty 7,500 lb. (3.4T) Jacking beam
4TRJ75HD 5 yr. parts warranty




Stainless Steel Turnplates 4TSTP



24V LED Lighting kit shuts off before
reaching the floor 4TLED



Built in runway tire inflation hoses with
pressure gauges 4TTIL

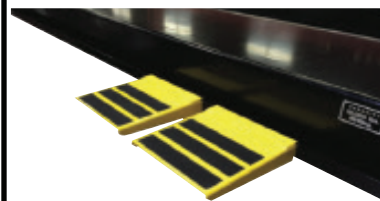

Removeable Runway Step Platforms with
non slip surface 4TMWS

4 POST ALIGNMENT 15,000 LB. / 6.8T CAPACITY

To learn more about the Coats 4 Post, or any of our
other quality products, contact your authorized
Coats distributor or call 1-855-876-3864 for the dealer
nearest you.

CONTACT US NOW

www.coatsgarage.com
or call 1-855-876-3864

coats


4 POST OPEN FRONT WHEEL ALIGNMENT 15,000 LB. / 6.8T CAPACITY

coats®


4T415OSAR1 / 4T415OXAR1



1. Machined 9" / 229mm Pulley & 1/2" / 12.3mm 6 x 36 cables




2. Double wall reinforced deck with Z rail



3. OPEN FRONT "Camber Neutral" Adjustable front arms



4. Air locking system with water trap/regulator filter standard

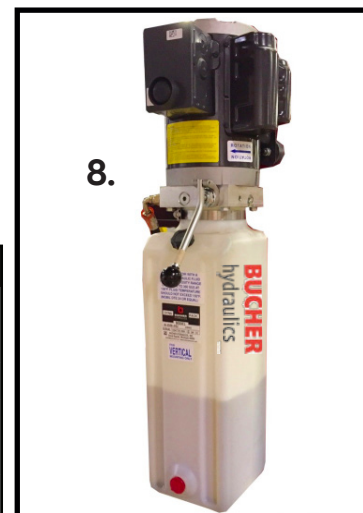


8.

Energy efficient US Made Bu-cher 2HP / 1.5kw power unit typically lasts the life of the lift - single point lock release

| FEATURE | |
|---------|--|
| 1. | 9" / 229mm steel pulleys with 1/2" / 12.3mm cables |
| 2. | Wide 23" / 584 mm double wall non flex runways |
| 3 | Optional "Open Front Design" |
| 4 | Durable powder coat double bake finish |
| 5 | Heavy Duty 3"x 8 1/4" / 74 - 210mm |
| 6 | Water trap/ air regulator/ filter |
| 7 | Single point air lock releases |
| 8 | Premium US made Bucher Power Unit |
| 9 | Open Runways with 7/8"/875mm plated slip plate balls |
| 10 | Flip down/ up front wheel stops |
| | 4" Diameter x 65" long / 102 x 1651 mm cylinder |

| BENEFITS | |
|----------|---|
| 1. | Last longer with less maintenance |
| 2. | More stable platform for light & medium duty trucks |
| 3 | Improved worker productivity |
| 4 | Resists corrosion reduces & maintenance costs |
| 5 | Less runway sagging & longer cable/pulley life |
| 6 | Protects locking & jack system for lower maintenance cost |
| 7 | Safer raising & lowering on the mechanical locking system |
| 8 | Lasts longer with Less maintenance |
| 9. | Easier to maintain reduces corrosion |
| 10 | Allows for clear access when performing alignment |
| | Lasts longer with Less maintenance |

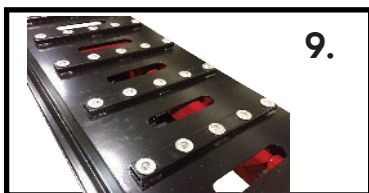


9. Open runway slots under rear slip plates



10. Flip down front wheel stops

EQUIPMENT FOOTPRINT

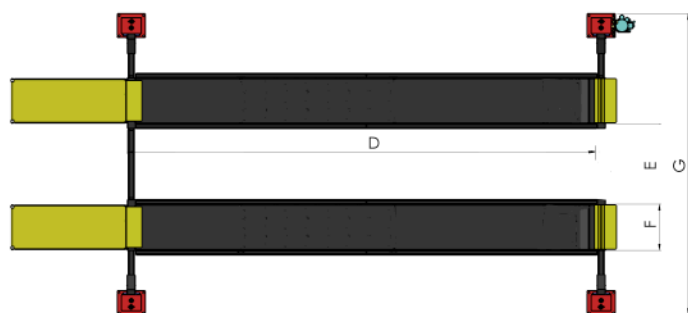

| CATEGORY | | OPEN FRONT 4 POST ALIGNMENT |
|----------|--|--|
| | CAPACITY | 15,000 lb. (6.8T) |
| A | RAISED HEIGHT | 75" (1905mm) |
| B | LOWERED HEIGHT | 8 3/8" (213mm) |
| C | OVERALL LENGTH EXTENDED | 287 1/2" (7303mm) |
| C | OVERALL LENGTH STANDARD | 260 1/2" (6617mm) |
| D | DECK LENGTH EXTENDED | 238" (6045mm) |
| D | DECK LENGTH STANDARD | 211" (5359mm) |
| E | WIDTH BETWEEN RUNWAYS | 41" (1041mm) |
| F | RUNWAY DECK WIDTH | 23" (584mm) |
| G | OVERALL WIDTH FRONT/REAR | 137 1/2" (3493mm) front - 143" (3632mm) rear |
| H | MAX COLUMN HEIGHT | 101 1/2" (2587mm) front - 86" (2184mm) rear |
| | MINIMUM & MAXIMUM 4 WHEEL ALIGNMENT | 84" to 164" (2234 to 4178mm) |
| | MINIMUM MAXIMUM 2 WHEEL ALIGNMENT EXTENDED | 209" (5309mm) |
| | MINIMUM MAXIMUM 2 WHEEL ALIGNMENT STANDARD | 182" (4623mm) |
| | MAXIMUM WHEEL BASE VEHICLE EXTENDED | 226" / 5055mm |
| | MAXIMUM WHEEL BASE VEHICLE STANDARD | 199" / 5055mm |
| | LIFT TIME | 70 seconds |
| | POWER REQUIREMENTS | 230V - 60Hz - 1Ph - 25 amp |
| | JACKING BEAM CAPACITY | 7,500 LB. (3.4T) |
| | SHIPPING WEIGHT | 4450 - 4750 lb. (2030 - 2159 kg.) |
| | PART NUMBERS | 4T415OSAR1/4T415OXAR1 |

www.coatsgarage.com

1601 J.P. Hennessy Drive, LaVergne, TN 37086 (800) 688-6496 or (615) 641-7533
Hennessy Canada: 2430 Lucknow Drive, Unit 9, Mississauga, Ontario L5S 1V3 (905) 672-9440