

GENERAL REPAIR

Complete Your Shop With
Coats® Equipment




SCISSOR LIFT ALIGNMENT OR SERVICE 12,000 LB. / 5.4T CAPACITY


Double Wall Runways with
"Z" Rails, Built-in Radius Plate
Pockets & Rear Slip Plates



Scissor Rack and Pinion
Style Gear Rack

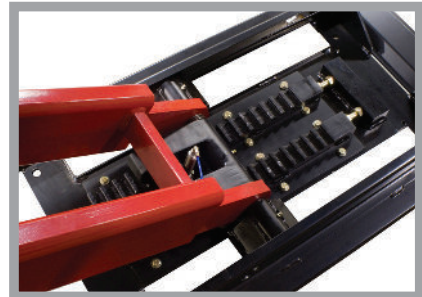

Open Runway Slots Under Rear
Slip Plates

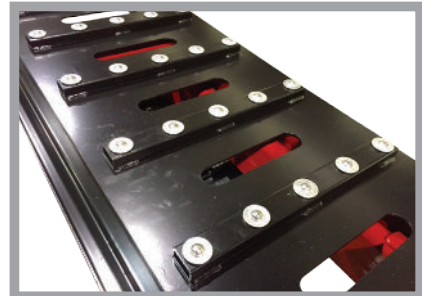

POWER UNIT OPTIONS

1. Enclosed Console Control
2. Wall/Floor Mount with Pendant



SCISSOR LIFT ALIGNMENT OR SERVICE 12,000 LB. / 5.4T CAPACITY

To learn more about the 12K Scissor, or any of our other quality products, contact your authorized Coats distributor or call 1-855-876-3864 for the dealer nearest you.

COATS®

CONTACT US NOW

www.coatsgarage.com
or call 1-855-876-3864




SCISSOR LIFT ALIGNMENT 12,000 LB. / 5.4T CAPACITY

LEGENDARY RELIABILITY WITH STATE OF THE ART CAPABILITY.

SPECIFICATIONS	* Dimension based on surface mounted lifts. For flush mount please contact factory.
Capacity	12,000 lbs / 5.4T
Overall Length	242 3/4" / 6166mm
Deck Length	185" / 4700mm
Overall Width	91 1/2" / 2324mm
Width Between Runways	41" / 1041mm
Deck Width	23" / 584 mm
Lowered Height	10 3/4" / 273mm
Raised Height	74" / 1880 mm
Minimum 4 Wheel Alignment Wheelbase	88 1/2" / 2248mm
Maximum 4 Wheel Alignment Wheelbase	164 1/2" / 4178mm
Maximum 2 Wheel Alignment Wheelbase	172" / 4369mm
Maximum Service Wheelbase	180" / 4572mm
Lift Time	58 Seconds
Power Requirements	230 Volts AC - 60 Hz - 1 PH - 25amp
Footprint	91 1/2"w x 242 3/4"d x 74"h
Ceiling Height Required	12'
Shipping Weight	5,890 lbs. / 2.8T
Part Number	Alignment: 4TS12OSAR1 Service: 4TS12OSSR1

EQUIPMENT FOOTPRINT

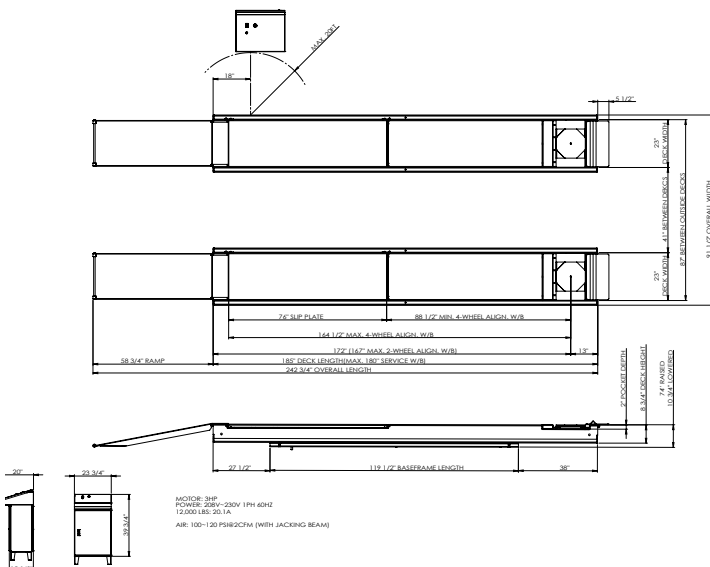

FEATURES

- Built to higher quality standard; 100% North American made**
 premium US Leeson 3HP / 2.2kw motor and HPI pump.
- Superior structural strength provides longer life and more precise alignments**
 Non flex double wall runways with built in "Z" rail and heavy duty 3" x 6.5" 3/8" / 76mm x 165mm 9.5mm wall tubular legs
- Greater flexibility with more models to chose from**
 Available in surface or flush mounted, alignment or service deck and a choice of floor mounted "console" control or space saving wall/ floor mounted power unit with pendant control.
- Premium options and accessories can expand the capabilities and service life**
 Stainless steel radius plates and rear steer plates, built in tire inflation hoses, removable work steps, LED runway lighting and premium heavy duty extended life 5 year warranty HD jacking beams
- Lower maintenance costs**
 steel components are wheel-a-brator shot blasted and acid washed before a "double bake" powder coat finish is applied. Zirk style grease fittings at all hinge points. Runway under rear slip plates is open to prevent water and dirt collecting.
- Precision levelling feature provides more accurate alignments**
 PCB Control with linear transducers control level to within 5/32" / 4mm. The full adjustable floor mounted rack and pinion style "gear blocks" allow for precise levelling.
- Designed for greater technician productivity**
 there are no obstructions between the runways or base frame. The lift rises 74" / 1880mm in 45 seconds with 20 locking positions. Built in runway compressed air outlets front and rear.


RECOMMENDED OPTIONAL ACCESSORIES



Jacking Beam
P/N (4TR6000)



Stainless Steel Turnplates
P/N (4TSSTP)



Runway Step Platforms
P/N (4TMWS)

