

GENERALREPAIR

Complete Your Shop With
Coats® Equipment



MID RISE SCISSOR 9,000 LB. / 4.1T CAPACITY

Compact Design Ideal
for Tires, Brakes, Body
Repair & Fast Lube




Quality and Performance



Air Release Mechanical Locking

Productivity Enhancing

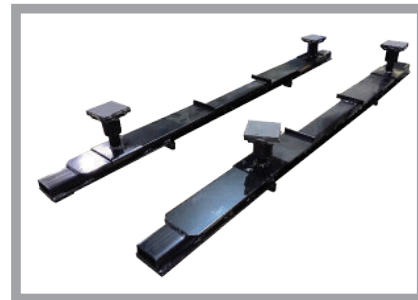

Light Truck Frame Adapter

MID RISE SCISSOR 9,000 LB. /
4.1T CAPACITY

To learn more about the Coats [Name of Product](#), or any of our other quality products, contact your authorized Coats distributor or call 1-855-876-3864 for the dealer nearest you.

COATS®

CONTACT US NOW

www.coatsgarage.com
or call 1-855-876-3864




MID RISE SCISSOR 9,000 LB. / 4.1T CAPACITY

SPECIFICATIONS	MID RISE BODY ENGAGING SCISSOR LIFT
Capacity	9,000 lb. / 4.1Kg
Power Supply	220V 12 Amp 2HP/ 1.5 kw
Hydraulic Cylinders	2 - 3" x 15" long / 76mm x 381mm long
Lifting Time	25 Seconds (220v)
Overall Width	78-3/4" / 2000mm
Overall Length	86-1/2" / 2200mm
Drive Over Height	4-1/8" / 105mm
Overall Lifting Height	39-3/8" / 1000mm (42" / 1066mm with adapters)
#of Mechanical Locks	5
Lock Release	Air cylinder lock release
Finish	Double bake coat
Height Adapters	4" / 101mm Rubber covered blocks
Lifting Pad Dimensions	61" to 82-1/2" Extended x 23-1/2" wide / 1550 to 2100mm Extended x 597mm wide
Equalization	Volumetric
Available In Flush Mount	Yes
Pull Out Deck Extension	Yes
Arm Reach Side To Side	N/A
Optional Light Truck Frame Adapter	Yes
Shipping Weight	850 lb. / 385 kg
Country Of Manufacture	Italy
Approvals UL/CSA/CE	Yes

FEATURES

- Compact design - rugged construction - Small foot print takes up less bay space while still allowing best in class weight capacities. Only 78 3/4" / 2000mm wide x 86 1/2" / 2200mm long.
- Versatility and ease of use - Ideal for small compact cars up to light duty trucks with pull out extensions allowing ease of use on short or long wheelbase vehicles. No tie bar or floor obstruction.
- Volumetric control stays level all the time - Thanks to single cylinder with dual chamber, unit stays level all the time. No electronic sensors required on the lift.
- Lower maintenance - less downtime - No Electronic sensors, No equalization valve, Extra-large pins with accessible grease fittings makes this ideal equipment for high duty cycle shops who require less downtime.
- Built for safety - 5 locking positions ensure side to side stability and eliminates accidental lowering of the lift. Single point air cylinder lock release.
- Unobstructed access - Open front and rear construction with no tie bars or torsion rods allows for unobstructed access to the underside of most vehicles with 27" / 686mm to 38" / 965mm of working area between the superstructures.
- Easy vehicle spotting - The flat deck platform and "spotting blocks" allows quick set-up by the operator increasing bay productivity.
- Low profile approach ramps or flush mount options - The low profile ramps 4-1/8" / 105mm collapsed height allow for accessibility of smaller compact cars while still allowing for heavier loads. The lift can also be flush mounted for the ultimate in productivity and space saving bay solutions.

EQUIPMENT FOOTPRINT

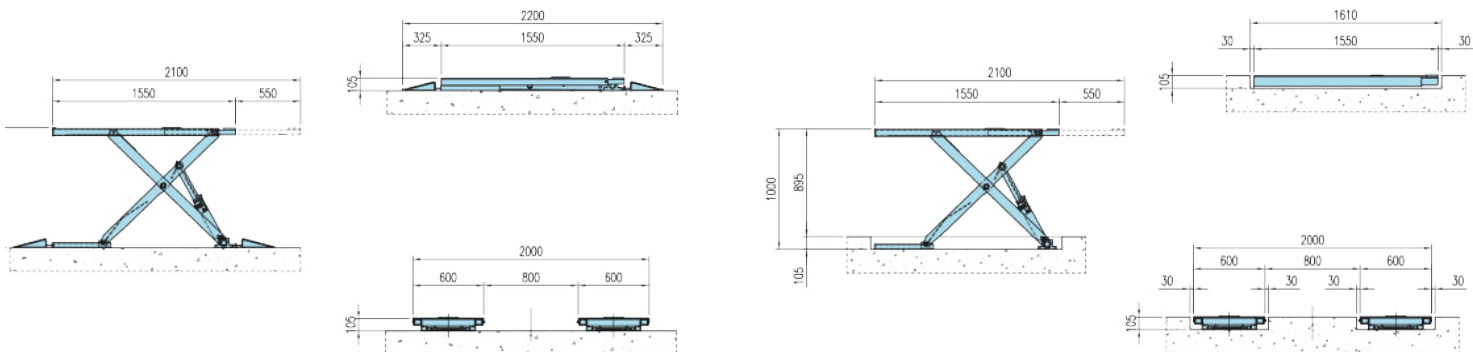

GOATS

www.coatsgarage.com

Part No. MKT Spec 07/17 Rev.00
© 2017 Hennessy Industries, Inc.

1601 J.P. Hennessy Drive, LaVergne, TN 37086 (800) 688-6496 or (615) 641-7533
HennessyCanada: 2430 Lucknow Drive, Unit 9, Mississauga, Ontario L5S 1V3 (905) 672-9440