

GENERAL REPAIR

Complete Your Shop With
Coats® Equipment



MID-RISE / LOW-RISE 6,000 LB. / 2.7T CAPACITY

Ideal for Tires, Brakes
& Detailing



Quality and Performance




USA-Made Bucher Pump & Motor 110v / 1HP /
.75kw or 220v / 2HP / 1.5kw CSA/UL Approved

Productivity Enhancing



Mid Rise Adapters

Versatility

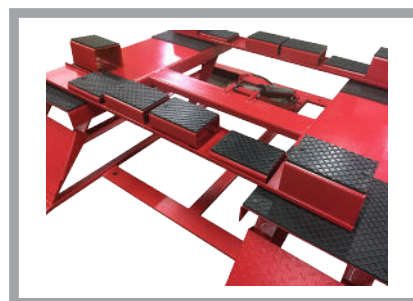

Low Rise Adapters

MID-RISE / LOW-RISE 6,000 LB. / 2.7T CAPACITY

To learn more about the Coats Mid-Rise / Low-Rise, or any of our other quality products, contact your authorized Coats distributor or call **1-855-876-3864** for the dealer nearest you.

COATS®

CONTACT US NOW

www.coatsgarage.com
or call 1-855-876-3864



MID-RISE / LOW-RISE 6,000 LB. / 2.7T CAPACITY

LEGENDARY RELIABILITY WITH STATE OF THE ART CAPABILITY.


SPECIFICATIONS	MID RISE	LOW RISE
Capacity	6,000 lbs. / 2.7T	
Power Supply	R4 models - 110V 15 Amp 1Ph R1 models - 220V 15 Amp 1Ph	
Hydraulic Cylinders	2 @ 3" OD x 28" Long / 76mm OD x 711mm Long	1 @ 4-1/4" OD x 19-1/2" long / 108mm OD x 495mm long
Lifting Time	30 seconds (220v)	25 seconds (220v)
Overall Width	39-1/2" / 1003mm	72-1/2" / 1841mm
Overall Length	102" / 2590mm	83" / 2108mm
Drive Over Height	5-1/2" / 140mm	3-1/2" / 89mm
Overall Lifting Height	54" / 1371mm (60" / 1524mm with adapters)	22" / 559mm (28" / 711mm with adapters)
# Of Mechanical Locks	7	3
Lock Release	Motorcycle hand grip	Cam style lobe release
Finish	Double bake powder coat	
Height Adapters	1-1/2", 2-1/4" & 5-3/4" / 38, 57 & 146mm Drop in stacking adapters	1-3/4", 3-1/2" & 5-3/4" / 44, 89 & 146mm Rubber covered steel blocks
Lifting Pad Dimensions	N/A	53" x 18-1/4" / 1346mm x 463mm
Swing Arms	4 - 27" / 685mm long	N/A
Frame Dimensions	39-1/2" x 71-1/2" / 1003mm x 1841mm	N/A
Arm Reach Front To Back	49-1/2" to 64" / 1257mm to 1625mm	N/A
Arm Reach Side To Side	42 to 66-1/2" / 1067mm to 1689mm	N/A
Shipping Weight	800 lb. / 362Kg	580 lb. / 263Kg
Mid Rise	4TLM6R1/4	
Low Rise	4TL6R1/4	

FEATURES

* Included With Purchase

- Premium North American Components** - North American made Monarch (Bucher) power unit and twin 3" / 76mm OD hydraulic cylinders (Mid Rise) or single 4-1/4" / 108mm OD cylinder (Low Rise) provide longer more dependable service life.
- Ideal for either hobby or commercial use** - the lift is built to industry standards and comes with a seven (7) position (Mid Rise) mechanical locking system and fail safe hydraulic velocity fuse in each cylinder. Both lifts are available in either 220v 1 phase 15 amp or 110v 1 phase 15 amp power supply. The Low Rider lift is built to industry standards and comes with a three (3) position mechanical locking system and fail safe velocity fuse.
- Ideal where there are low ceilings or minimal space (Mid Rise)** - the compact space saving design is only 40" / 1016mm wide by 99-1/2" / 2527mm long with a frame lowered height of 5-1/2" / 140mm. (Low Rise) lifts 26" / 660mm in 36 seconds for quick access to the vehicle, no obstruction around the lift improves productivity.
- Multi purpose design excellent for cars, SUV's and light trucks** - (Mid Rise) adjustable rotating swing arms provides maximum reach. Stacking adapters provide all overall maximum lifting height of 60" / 1524mm.
- (Low Rise) Large rubber padded lifting decks 18" x 53" / 463mm x 1346mm** provide a stable platform for most cars and light trucks. A set of four (4) lifting adapters are included. Low drive over height of 3-1/2" / 89mm is ideal for compact and sport cars.
- Corrosion resistant protection** - steel structural components are wheel-a-brator shot blasted and acid washed before a "double bake" powder coat finish.

EQUIPMENT FOOTPRINT

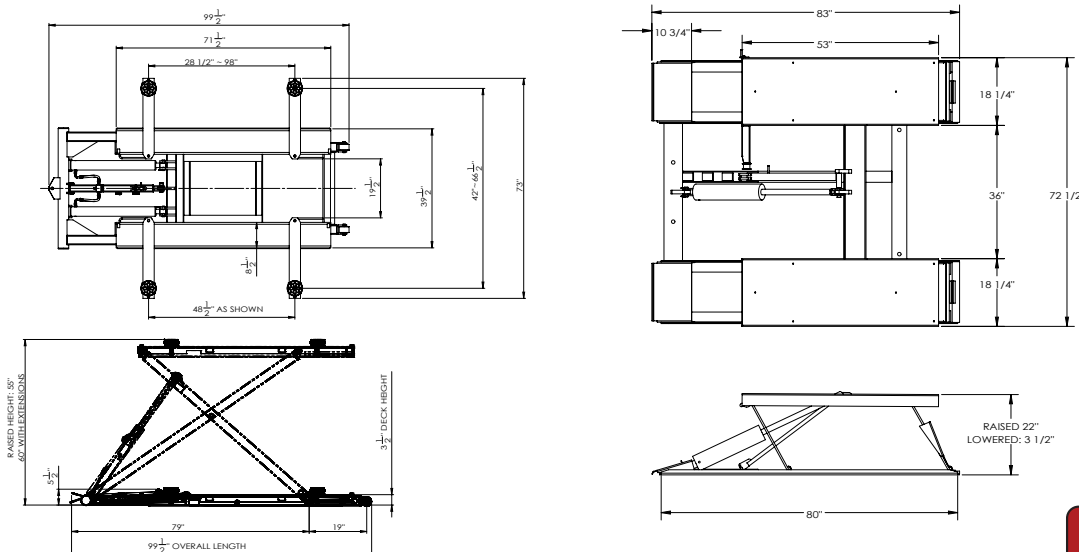

COATS

www.coatsgarage.com

Part No. MKT Spec 07/17 Rev.00
© 2017 Hennessy Industries, Inc.

1601 J.P. Hennessy Drive, LaVergne, TN 37086 (800) 688-6496 or (615) 641-7533
Hennessy Canada: 2430 Lucknow Drive, Unit 9, Mississauga, Ontario L5S 1V3 (905) 672-9440