

GENERAL REPAIR

Complete Your Shop With
Coats® Equipment


COATS®

AIR / HYDRAULIC JACKING BEAMS

AIR/HYDRAULIC SCISSOR JACKING BEAMS

FROM 6,000LB. TO 15,000LB. (2.7 T TO 6.8T)
- DESIGNED TO FIT ALL COATS 4 POST AND
SCISSOR LIFTS

CHOOSE THE RIGHT JACK FOR YOUR LIFT

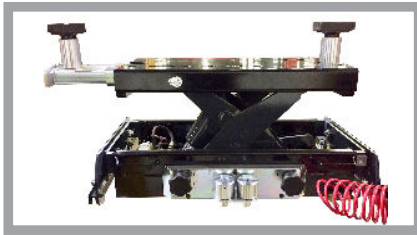

Our Best & Most Dependable
Premium Heavy Duty Jacking Beam
made in Denmark with five (5) years
Parts Warranty - 6,000LB./2.7T, 7,000LB./
3.2T, 7,500LB./ 3.4T, 8,000LB./ 3.6T & 9,000LB./
4.1T Capacity - 4TRJ6000HD, 4TRJ7000HD,
4TRJ7500, 4TRJ8000 & 4TRJ9000HD



Best Value in a Light Duty Jack

Deluxe Jacking Beam made in
Denmark with a one (1) year Parts
Warranty - 6,000LB./ 2.7T & 7,000 LB./
3.2T & 7,500 LB. /3.4T Capacity - 4TR-
J6000HA, 4TRJ7000HA & 4TRJ7500HA



Economy Priced Light Duty

Economy Priced Light Duty
Jacking Beam made in China
with a one (1) year Parts Warranty
- 6,000LB./ 2.7T & 7,000LB./ 2.2T Capacity
- 4TRJ6000 & 4TRJ7000



For Medium and Heavy Duty

Medium Duty Jacking Beam Made
in North America One (1) Year
Parts Warranty - 12,000LB./ 5.5T &
15,000LB. / 6.8T Capacity - 4TRJ12000 &
4TRJ15000

LIFT APPLICATIONS



▲ Light Duty 4 Post 15,000LB.(6.8T)



▲ Medium Duty 4 Post 19,000LB. - (8.6T)



▲ Scissor Alignment Lift 12,000LB.,
14,000lb. & 16,000LB (5.5, 6.4, 6.8T)



▲ Heavy Duty 4 Post - 30,000LB. -
33,000LB (13.6 - 15T)

AIR/HYDRAULIC JACKING BEAMS FOR WHEEL FREE LIFTING

MAY 2021

To learn more about the Coats Jacking Beams or any of our other quality products, contact your authorized Coats distributor or call 1-855-876-3864 for the dealer nearest you.

CONTACT US NOW

www.coatsgarage.com
or call 1-855-876-3864

COATS®

PREMIUM "RJ" SERIES AIR HYDRAULIC JACKING BEAMS



JACKING BEAMS FROM 6,000LB./2.7T TO 15,000LB. / 6.8T CAPACITY

WHY THE AC HD "PREMIUM" JACK BEAM IS THE WORLDS BEST!

- Strong and robust design makes it ideal for lifting heavy unevenly loaded vehicles.
- Flexible top support beam can be extended up to 59" (1500mm).for added reach.
- Superior structural strength provides longer life and more precise lifting.
- Exceptionally low collapsed height of is preferrable for low to the ground vehicles
- Two handed lowering operation with a dead man's safety release, an automatic locking device and overload valve offer optimum safety.
- Tough powder coat finish on the frame and scissor components with the retractable arms nickel zinc plated to resist corrosion.
- Two stage telescoping arms extend from 30 3/4" to 59" (780 to 1500mm) allowing the operator to reach most pickup points.
- Unique AC designed air motor drives the hydraulic pressure required for the single hydraulic cylinder. Unlike most "barrel" or "box" style aftermarket pumps, this system is virtually impervious to normal air born moisture and dirt.
- The AC Premium HD jack eliminates the problem of constantly replacing the suspension and track rollers. There is a single stainless steel flat spring with track rollers and adjustable side thrust rollers. The jack only collapses on to the frame when under load.
- There are two durable square slotted style rubber contact adapters supplied with 2 each of the 1 1/2" and 3 1/4" height extensions (38mm and 83mm).

SPECIFICATIONS	"PREMIUM" HEAVY DUTY LIGHT DUTY CAR/LIGHT TRUCK	DELUXE STANDARD USE CAR/LIGHT TRUCK	ECONOMY CAR/LIGHT TRUCK	LIGHT & MEDIUM DUTY TRUCK
Capacity	6,000LB., 7,000LB., 7,500LB., 8,000LB & 9,000LB. (2.7T, 3.2T, 3.4T, 3.6T & 4.1T)	6,000LB. 7,000LB. (2.7T & 3.2T)	6,000LB. & 7,000LB.(2.7T & 3.2T)	12,000LB. & 15,000LB. (5.5T & 6.8T)
Lifting design	Sgl. hydraulic with scissor - air/hydraulic	Sgl. hydraulic with scissor/ air hydraulic	Sgl. hydraulic with scissor/ air hydraulic	Sgl. hydraulic with scissor/ air hydraulic
Suitable application	12,000LB., 14,000LB., 15,000LB., 16,000LB., 18,000LB. & 19,000LB. (5.5T, 6.4T, 6.8T, 7.3T, 8.2T & 8.6T) 4 Post or Scissor	12,000LB. & 14,000LB. (5.5T & 6.4T) 4 Post or Scissor	12,000LB. & 14,000LB. (5.5T & 6.4T) 4 Post or Scissor	19,000LB., 30,000LB. & 33,000LB. (8.6T, 13.6T & 15T) Four Post
Country of Manufacture	Denmark EU	Denmark EU	(PRC) China	Canada
Parts Warranty	Five (5) Years	One (1) Year	One (1) Year	One (1) Year
Stroke	9.84" (250mm)	9.84" (250mm)	7.6" (193mm)	11" (279mm)
Contact & height adapters	1" (25.4mm) rubber pad with 2 x 1.5" & 2 x 3.25" (38mm & 83mm) height adapters	1" (25.4mm) rubber pad with 2 x 1.5", 2 x 3.25" & 2 x 8" (38mm, 83mm & 203mm) zinc plated height adapters	1" (25.4mm) rubber pad with 2 x 2.83" & 2 x 5.43" (72mm & 138mm) height adapters plus 2 x 5.71" (145mm) truck axle adapters	2 x 3.5" & 2 x 5.5" (88.9 & 140mm)
Minimum Height	9.6" (244mm)	7.1" (180mm)	9.8" (249mm)	12 3/4" (323.9mm)
Support Arms Reach	30.75" - 59" (780 - 1500 mm)	30.75" - 63.4" (780 - 1610 mm)	36.1" - 55.7" (916mm - 1415)	43" to 63.5" (1092 to 1613mm)
Telescoping arm	2 stage zinc plated	2 stage zinc plated	1 stage	1 stage
Overall Width	30.75" - 48" (780 - 1220 mm)	30.75" - 46.5" (780 - 1180 mm)	36.2" - 52.1" (919mm - 1324mm)	40" to 64" (1016mm to 1627mm)
Lifting frame height	3" (75mm)	2.36" (60mm)	3" (77mm)	3" (77mm)
Lifting frame depth	13.6" (345 mm)	9.8" (250mm)	8.5" (216mm)	5" (127mm)
Compressed Air Required	100-175 psi (7-12 bar)	100-175 psi (7-12 bar)	100-175 psi (7-12 bar)	100-175 psi (7-12 bar)
Shipping weight	385LB. (175kg.)	243LB. (110kg.)	300LB. (136.4kg.)	425LB. (193.2kg.)
Protective finish	Powder Coat & Zinc Plated Arms	Powder Coat & Zinc Plated Arms	Powder Coat	Zinc plated arms & Scissor
Mechanical locking	3 lock postions 2 handed lowering	3 lock postions 2 handed lowering	4 lock postions 2 handed lowering	2 lock postions 2 handed lowering

HEAVY DUTY & DELUXE JACKS




Heavy duty low maintenance pump



Stainless steel suspension & rollers



Plated controls & height extensions

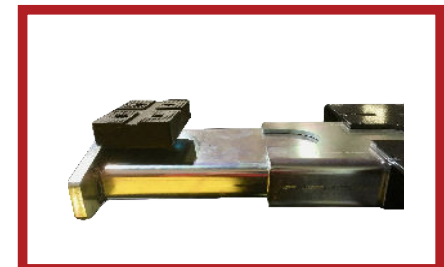

Heavy duty plated arms/ rubber pads



(780mm to 1500 mm)
Telescoping arms reach 30 3/4"