## coats

Engineered to Perform. Designed to Last.

## 4-POST LIFTS

15,000 lb and 19,000 lb Capacity Alignment Lifts



#### **15K Alignment**

4T415CSAR1 • 4T415CXAR1 • 4T415OSAR1 4T415OXAR1 • 8K4P15SKITP • 8K4P15XKITP

#### **19K Alignment**

4T419CSAR1 • 4T419CXAR1 • 8K4P19SKITP • 8K4P19XKITP

# Perfect for Performing 3D Alignments on All Cars, Light and Medium Duty Trucks


Coats 4 post lifts provide an ideal and affordable multipurpose platform for performing services and alignments.

4 Wheel Alignment

84" to 164 1/2" Wheelbase

2 Wheel Alignment

182" to 209" Wheelbase

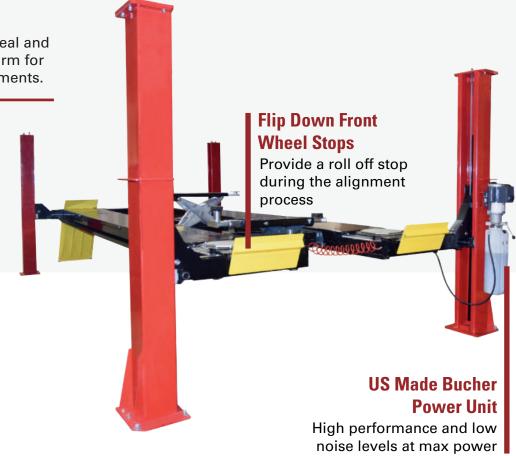



#### **Rear Slip Plates**

#### **Open Runway Slots**

Chrome ball bearings and open slots allow liquid and shop debris to fall through

#### **Elevated Bearings**

Prevent contamination and eliminates corrosion, offering free movement



#### **Front Turnplates**

#### **Stainless Steel**

Protects against corrosion and premature wear

#### **Polyethylene Pocket Liner**

Prevents coating damage while providing corrosion resistance and easy turnplate positioning.

#### **Corrosion Resistant**

#### **Powder Coat**

Improves durability of the lift by protecting against structural corrosion

#### **Krown Rustproofing**

Industrial rustproofing protection sprayed on inside and outside surfaces

## **4 Post Alignment Lift Kits**

8K4P15SKITP 8K4P19SKITP 8K4P15XKITP

## 15,000 lb 19,000 lb

## **Lift Packages Include**

- Standard or extended length 15K or 19K4 Post Alignment Lift
- Accessories for 3D alignments\*





#### **Heavy Duty Rolling Jacks**

Two of our premium and best valued heavy duty rolling jacks



**Turn Plate Roll Back Bars** 

Provides a smooth transition between the turnplates and the runways for accurate alignment readings




#### **Air Kit**

Factory installed for technicians to use air tools. Disconnects not provided.



**Stainless Steel Turnplates** 

Heavy duty, durable, and reduces corrosion keeping maintenance costs low



#### **15K Closed Front**

Crossbeam across the front posts of the lift enhances stability.

Low collapsed height of 7 3/4"(197mm)



#### **15K Open Front**

No crossbar, making it easier for technicians to maneuver under the lift

Low collapsed height of 8 3/8" (213mm)



5K Styles

The only 4 Post Open Front lift that allows the front beams to be easily field adjusted for level by a technician.



**Standard Size** 

#4T415CSAR1 / #4T415OSAR1

211" Runway Length



238" Runway Length



### **Ask About Our 15K Drive Thru Kit!**

**#4T154PDTK** 

Having ramps on the front of the lift will add more options for your technicians to drive customer vehicles in and out.



## **Ask About Our 19K Drive Thru Kit!**

#4T194PDTK

Add more versatility to your shop layout by adding drive-thru ramps on the front of the lift.





#### **Double Stacked Pulleys**

Pulleys are double stacked on two chrome plated pins with grease fittings allowing lubrication and reducing localized system loading and stresses over a larger area compared to lifts having one pin with four pulleys stacked.



#### **Cables & Pulleys**

Prestretched cables reduces the frequency of cable level adjustments. Large machined steel pulleys with self lubricated bearings reduce friction between moving parts.



#### **Grease Fittings**

Lubricated grease fittings reduce maintenance costs.



#### **Air Lock Release**

This configuration on the lift ensures quality air with supplied filter, lubricator, and regulator.



#### **Camber Neutral**

Open Front camber neutral adjustable support beams with stronger bearings reducing expensive calibration servicing.



#### **Non-Rotating Trunnions**

Prevent twisting and pulling of cables, preventing unwanted damage and uneven stress.



#### **Non-Flex Runways With Z Rail**

Reinforced double walled runways reduce flex, increasing alignment accuracy and repeatability.



### **Built to Perform**

Our 4 Post Alignment Lifts are designed and assembled in North America using raw materials and parts sourced from premium suppliers. Our lifts undergo third party testing to secure ALI Certification. This testing goes beyond the minimum requirements to provide longer life with less maintenance, keeping total cost of ownership low.



#### **Stainless Steel Materials**

Corrosion resistant stainless steel air lock release cylinders to lower cost of ownership.

## Add Rolling Jacks To Your Lift!

Expand on your lift capabilities by adding rolling jacks to help perform brake, wheel, alignment, and other services. We recommend two rolling jacks to maximize your shop performance.

#### **5 Year Parts Warranty**



## **Heavy Duty**

Includes 2" Rubber Adapters, with 2" and 4" Extension Adapters.

#### For 15K Lift

**7,500 lb Hydraulic HD Rolling Jack**#4TRJ7500HD

#### For 19K Lift

9,000 lb Hydraulic HD Rolling Jack #4TRJ9000HD

#### 1 Year Parts Warranty



#### **Standard**

Includes 1" Rubber Adapters, with 1-1/2" to 3-1/4" and 8" Extension Adapters.

#### For 15K Lift

**7,500 lb Hydraulic Rolling Jack**#4TRJ7500HA



## Add The CWA 6500 Aligner

- Moveable Cabinet
- Tracking Camera Beams
- Vin Scanner
- Printer
- Brake Depressor
- 4 QC Tire Gripping Clamps
- 4 Standard Clamps
- Black Diamond Mini Targets
- Steering Wheel Holder

#8006500

#### Who We are

The Coats Company is a leading, global manufacturer and distributor of automotive service equipment and solutions. Based in Nashville, TN, we work with shops and dealerships around the world.

#### What We Do

- Maximize your uptime with our durable & reliable products
- ✓ Improve productivity with the fastest floor to floor times
- Provide easy to use equipment and solutions to our customers

#### Why Coats

- ✓ Legacy For over 75 years, Coats has been trusted by shops and dealers across the country
- ✓ Reliability Customer and technical service when you need it most
- ✓ Profitability Our products make your shop or dealership more efficient and profitable

## 15K and 19K 4 Post Alignment Lift Accessories



Moveable Work Step #4TMWS (Set of 2)

Removable platforms with non slip surface



**Stainless Steel Front Turnplates** 

#4TSSTP (Set of 2)

Heavy duty turnplates for alignments service



Rolling Waste Oil Drain

#4T4RWOD

30 gallon capacity with antislosh baffles for automotive liquids and waste



**Turn Plate Roll Back Bars** 

#4TTPRBB (Set of 2)

Provides a smooth transition between front turnplates and the runway



**LED Lighting Kit** 

#4TLED1 (Set of 2)

Factory installed LED runway kit illuminating under vehicle



**Turnplate Pocket Fillers** 

#4TSTPF (Set of 2)

Covers the front turnplate converting the alignment lift to service



Low Profile Ramp Extensions

#4TLPRE (Set of 2)

Non-slip, bolt-on, 3 foot long ramps used for tighter shop spaces and lowered vehicles



Air Electric Station with Tool Holder

#4TAEPS (Individual)

Convenient for technicians to keep tools close to the lift



Air Kit

#4TSKAT

Factory installed for technicians to use air tools. Disconnects not provided




**Tire Inflation Kit** 

#4TTIL (Set of 4)

Built in tire inflation hoses with pressure gauges for all sides front and back of the lift

#### SPECIFICATIONS

	4 Post 15K Alignment  15,000 lb/6.8T  Yes		4 Post 19K Alignment  19,000 lb/8.6T  Yes
Capacity			
ALI Certification			
Open Front or Rear	Open Front	Closed Front	Closed Front
Raised Height	<b>75"</b> (1,905mm)	<b>75"</b> (1,905mm)	<b>74"</b> (1,905mm)
Lowered Height	8 3/8" (213mm)	7 3/4" (197mm)	<b>10"</b> (254mm)
Overall Length Standard	<b>260 1/2"</b> (6,617mm)		274 3/8" (6,969mm)
Overall Length Extended	<b>287 1/2"</b> (7,303mm)		<b>301 3/8"</b> (7,655mm)
Deck Length Standard	211″	(5,359mm)	<b>210 3/8"</b> (5,344mm)
Deck Length Extended	238″	(6,045mm)	<b>238"</b> (6,045mm)
Width Between Runways	41"	(1,041mm)	<b>41"</b> (1,041mm)
Runway Deck Width	26"	(660mm)	<b>26"</b> (660mm)
Overall Width Front/Rear	143" / 137 1/2" (3,632mm / 3,493mm)	<b>137 1/2"</b> (3,493mm)	<b>150"</b> (3,810mm)
Max Column Height	<b>101 1/2"</b> (2,587mm)	<b>86"</b> (2,184mm)	<b>86"</b> (2,184mm)
Width Between Front Wheel Stops	87 1/2	" (2,222mm)	<b>87 1/2"</b> (2,222mm)
Min 4 Wheel Alignment WB	84"	(2,234mm)	<b>84"</b> (2,234mm)
Max 4 Wheel Alignment WB	164 1/2	<b>2"</b> (4,178mm)	<b>164 1/2"</b> (4,178mm)
Max 2 Wheel Alignment WB Standard	182"	(4,623mm)	<b>182"</b> (4,623mm)
Max 2 Wheel Alignment WB Extended	209"	(5,309mm)	<b>209"</b> (5,309mm)
LiftTime	70 seconds		70 seconds
Power Requirements	230V, 60Hz, 1Ph, 25 amp		230V, 60Hz, 1Ph, 20 amp
Recommended Jacking Beam	7,500 lb/3.5T		9,000 lb/4.1T
Part Numbers	Open: 4T415OSAR1 / 4T415OXAR1 Closed: 4T415CSAR1 / 4T415CXAR1 Alignment Kits: 8K4P15SKITP / 8K4P15XKITP		Closed: 4T419CSAR1 / 4T419CXAR1 Alignment Kits: 8K4P19SKITP / 8K4P19XK

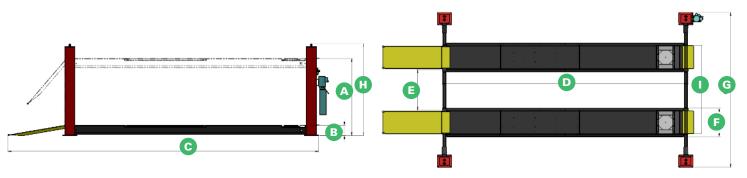





#### **ALI Associate Member**

Coats distributes ALI-Certified lifts and is an active ALI Associate Member



#### **North American Assembled**

Coats uses premium components sourced in the U.S. and abroad.



#### **ALI Lift Inspections**

Every Coats Lift Inspector is certified to perform ALI-Lift Inspections for any brand's lift. Book with us today!

(800)-688-6359



https://coatscompany.com/productseries-4-post-lifts/

# Coats

## **Contact Us!**

www.coatscompany.com/contact/ Sales Inquiries: **855-876-3864** Customer Service: **800-688-6359** 

1601 J.P. Hennessy Drive LaVergne, TN 37086

2430 Lucknow Drive Unit 9 Mississauga, Ontario L5S 1V3 Canada

<sup>\*</sup>Disclaimer: The Coats Company, LLC is constantly updating their products to maintain the highest possible standards of performance and safety. The specifications, descriptions, and photos in this brochure are only accurate at the time of printing and are subject to change with or without notice.