coats

Engineered to Perform. Designed to Last.

4-POST LIFTS

15K, 19K, 30-33K Service Capacities



15K Service


4T415CSSR1 • 4T415CXSR1 4T415OSSR1 • 4T415OXSR1 19K Service


4T419CSSR1 • 4T419CXSR1


30-33K Service

4T430CSSR1 • 4T430CSXR1 • 4T430CESR1 4T433CSSR1 • 4T433CSXR1 • 4T433CESR1

www.coatscompany.com 855-876-3864

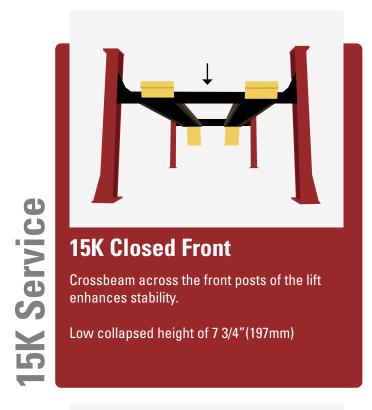

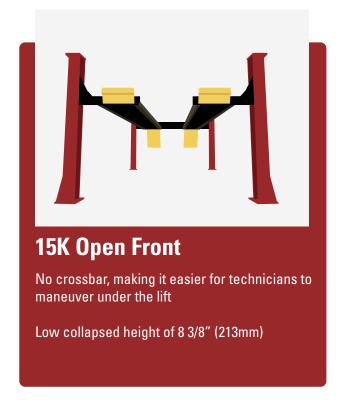

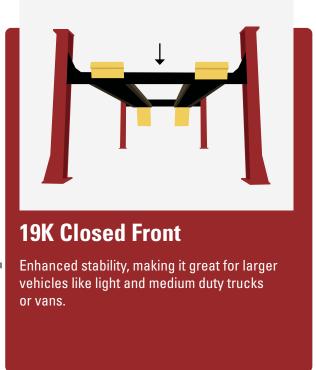

15K Capacity

Standard Size #4T415CSSR1

Length

Extended Size #4T415CXSR1

210" Runway

237" Runway Length

19K Capacity

Standard Size #4T415CSSR1


211" Runway

Length



Extended Size #4T415CXSR1

238" Runway Length

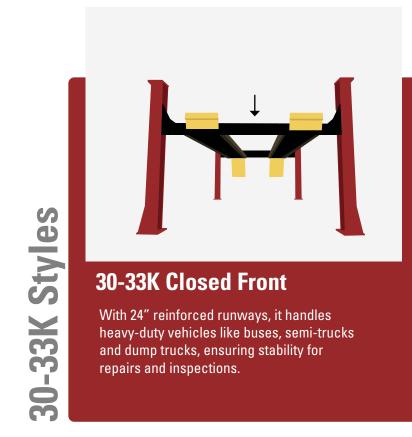



264" Runway Length





336" Runway Length



Ask About Our 15K & 19K Drive Thru Kit!

Having ramps on the front of the lift will add more options for your technicians to drive customer vehicles in and out.




Ask About Our 30-33K Drive Thru Kit!

#4T304PDTK

Add more versatility to your shop layout by adding drive-thru ramps on the

Perfect for Performing Service on All Cars, Light, Medium, Heavy Duty Trucks

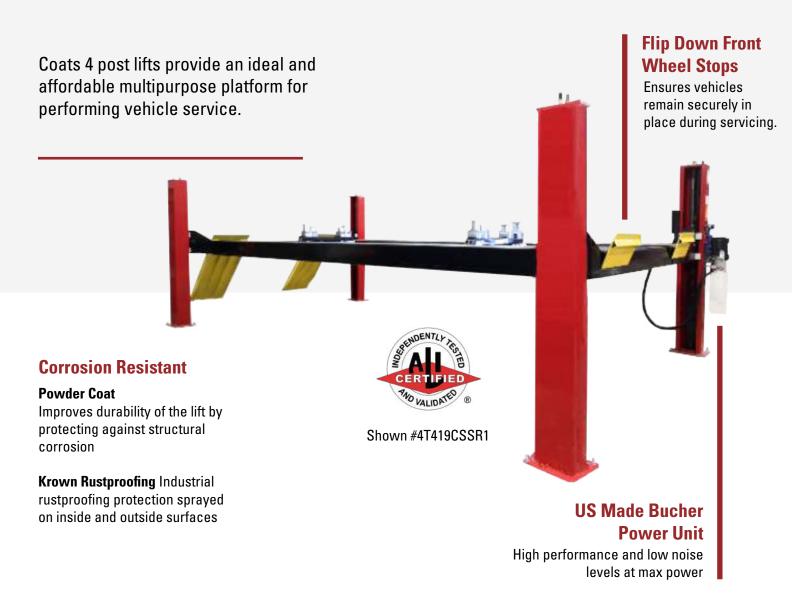

Built to Perform

Our 4 Post Service Lifts are designed and assembled in North America using raw materials and parts sourced from premium suppliers. Our lifts undergo third party testing to secure ALI Certification. This testing goes beyond the minimum requirements to provide longer life with less maintenance, keeping total cost of ownership low.



Grease Fittings

Lubricated grease fittings reduce maintenance costs.



Double Stacked Pulleys

Pulleys are double stacked on two chrome plated pins with grease fittings allowing lubrication and reducing localized system loading and stresses over a larger area compared to lifts having one pin with four pulleys stacked.



Non-Rotating Trunnions

Prevent twisting and pulling of cables, preventing unwanted damage and uneven stress.



Stainless Steel Materials

Corrosion resistant stainless steel air lock release cylinders to lower cost of ownership.



Air Lock Release

This configuration on the lift ensures quality air with supplied filter, lubricator, and regulator.



Cables & Pulleys

Prestretched cables reduces the frequency of cable level adjustments. Large machined steel pulleys with self lubricated bearings reduce friction between moving parts.



Non-Flex Runways With Z Rail

Reinforced double walled runways reduce flex, increasing alignment accuracy and repeatability.

4

Add Rolling Jacks To Your Lift!

Expand on your lift capabilities by adding rolling jacks to help perform brake, wheel, suspension, and other services. We recommend two rolling jacks to maximize your shop performance.

1 Year Parts Warranty



High Capacity Heavy Duty

Includes 2" Rubber Adapters, with 2" and 4" Extension Adapters.

For 30-33K Lift

15,000 lb Hydraulic HD Rolling Jack #4TRJ15

5 Year Parts Warranty



Heavy Duty

Includes 2" Rubber Adapters, with 2" and 4" Extension Adapters.

For 15K Lift

7,500 lb Hydraulic HD Rolling Jack#4TRJ7500HD

For 19K Lift

9,000 lb Hydraulic HD Rolling Jack #4TRJ9000HD

1 Year Parts Warranty



Standard

Includes 1" Rubber Adapters, with 1-1/2" to 3-1/4" and 8" Extension Adapters.

For 15K Lift

7,500 lb Hydraulic Rolling Jack#4TRJ7500HA

Who We are

The Coats Company is a leading, global manufacturer and distributor of automotive service equipment and solutions. Based in Nashville, TN, we work with shops and dealerships around the world.

What We Do

- Maximize your uptime with our durable & reliable products
- Improve productivity with the

 fastest floor to floor times
- Provide easy to use equipment and
 ✓ solutions to our customers

Why Coats

- ✓ Legacy For over 75 years, Coats has been trusted by shops and dealers across the country
- ✓ Reliability Customer and technical service when you need it most
- Profitability Our products make your

 ✓ shop or dealership more efficient and profitable

15K and 19K 4 Post Service Lift Accessories



Moveable Work Step

#4TMWS (Set of 2)

Removable platforms with non slip surface



Low Profile Ramp Extensions

#4TLPRE (Set of 2)

Non-slip, bolt-on, 3 foot long ramps used for tighter shop spaces and lowered vehicles



Rolling Waste Oil Drain #4T4RW0D

30 gallon capacity with antislosh baffles for automotive liquids and

waste



Air Kit #4TSKAT

Factory installed for technicians to use air tools.

Disconnects not provided



LED Lighting Kit

#4TLED1 (Set of 2)

Factory installed LED runway kit illuminating under vehicle



Air Electric Station with Tool Holder

#4TAEPS (Individual)

Convenient for technicians to keep tools close to the lift



Tire Inflation Kit

#4TTIL (Set of 4)

Built in tire inflation hoses with pressure gauges for all sides front and back of the lift

6


SPECIFICATIONS

	4 Post 15K Service		4 Post 19K Service
Capacity	15,000 lb/6.8T		19,000 lb/8.6T
ALI Certification	Yes		Yes
Open Front or Rear	Open Front	Closed Front	Closed Front
A Raised Height	75" (1,905mm)		74" (1,880mm)
B Lowered Height	8 3/8" (213mm)		8 7/8" (225mm)
C Overall Length Standard	258 " (6,553mm)		274" (6,960mm)
Overall Length Extended	285 " (7,239mm)		301" (7,645mm)
D Deck Length Standard	210" (5,359mm)		211" (5,359mm)
Deck Length Extended	237" (6,045mm)		238" (6,045mm)
Width Between Runways	41 " (1,041mm)		41" (1,041mm)
F Runway Deck Width	23" (584mm)		23" (584mm)
G Overall Width Front/Rear	143" (3,632mm)	137 1/2" (3,493mm)	150 " (3,810mm)
H Max Column Height	101 1/2" (2,587mm)	86" (2,184mm)	86" (2,184mm)
Width Between Outside Decks	87 1/2" (2,222mm)		87 1/2" (2,222mm)
Lift Time	70 seconds		70 seconds
Power Requirements	230V, 60Hz, 1Ph, 25 amp		230V, 60Hz, 1Ph, 20 amp
Recommended Jacking Beam	7,500 lbs / 3.5T		9,000 lbs / 4.1T
Part Numbers	Open: 4T415OSSR1 / 4T415OXSR1 Closed: 4T415CSSR1 / 4T415CXSR1		Closed: 4T419CSSR1 / 4T419CXSR1

A H E D G

SPECIFICATIONS

		4 Post 30K Service	4 Post 33K Service	
	Capacity	30,000 lb. (13.6T)	33,000 lb. (15T)	
	ALI Certification	Yes		
	Open Front or Rear	Closed Front		
A	Raised Height	70 1/4" (1,784mm)		
B	Lowered Height	10" (254mm)		
C	Overall Length Standard	328 1/4" (8,338mm)		
	Overall Length Extended	365 1/4" (9,252mm)		
	Overall Length Extra Long	400 1/4" (10,166mm)		
D	Deck Length Standard	261 " (6,629mm)		
	Deck Length Extended	297" (7,544mm)		
	Deck Length Extra Long	333" (8,458mm)		
(3)	Width Between Runways	42" - 48" (1,067mm - 1,219mm)		
6	Runway Deck Width	24" (610mm)		
G	Overall Width Front/Rear	153" (3,886mm)		
H	Column Height	92 1/2" (2,350mm)		
	Lift Time	100 seconds		
	Power Requirements	230V, 60Hz, 1Ph, 25 amp		
	Recommended Jacking Beam	15,000 lb. (6.8T)		
	Part Numbers	4T430CSSR1 4T430CXSR1 4T430CESR1	4T433CSSR1 4T433CXSR1 4T433CESR1	

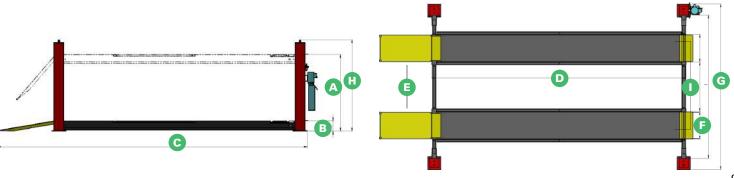

Why Choose Coats Lifts?



ALI Associate Member

Coats distributes ALI-Certified lifts and is an active ALI Associate Member



North American Assembled

Coats uses premium components sourced in the U.S. and abroad.



ALI Lift Inspections

Every Coats Lift Inspector is certified to perform ALI-Lift Inspections for any brand's lift. Book with us today!

(800)-688-6359



https://coatscompany.com/productseries-4-post-lifts/

COALS

Contact Us!

www.coatscompany.com/contact/ Sales Inquiries: **855-876-3864** Customer Service: **800-688-6359**

1601 J.P. Hennessy Drive LaVergne, TN 37086

2430 Lucknow Drive Unit 9 Mississauga, Ontario L5S 1V3 Canada

*Disclaimer: The Coats Company, LLC is constantly updating their products to maintain the highest possible standards of performance and safety. The specifications, descriptions, and photos in this brochure are only accurate at the time of printing and are subject to change with or without notice.