

coats

Engineered to Perform. Designed to Last.

LOW PROFILE LIFTS

6,000 lb., 6,600 lb., and 10,000 lb. Capacities



6K, 6.6K, 10K

6K Mid Rise Portable Scissor Lift

4TLM6R1 • 4TLM6R4

6.6K Mid Rise Scissor Lift

4TS6SSOR1

10K Dual Scissor Lift

4TS10SSOR1FM

10K Low Rise Cantilever Pad Lift

4TPD10SSR1 • 4TPD10SSR4



6,000 lb Mid Rise Portable

Cars and Light Trucks

Ideal for tires, brakes, and detailing services

Portable with wheels and cart

Includes adapters to fit most vehicles

#4TLM6R1 / #4TLM6R4



6,600 lb Mid Rise

Cars and Light Trucks

For tires, brakes, body repair, and quick lube

Unobstructed access for more versatility in services

Efficient for smaller bay designs

#4TS6SSOR1



#4TS10SSOR1

10,000 lb Dual Scissor


Cars and Light Trucks

Ideal for drive thru doing tires, brakes, and quick lube

Solid design with increased capacity

Surface Mount or Flush Mount

#4TS10SSOR1FM

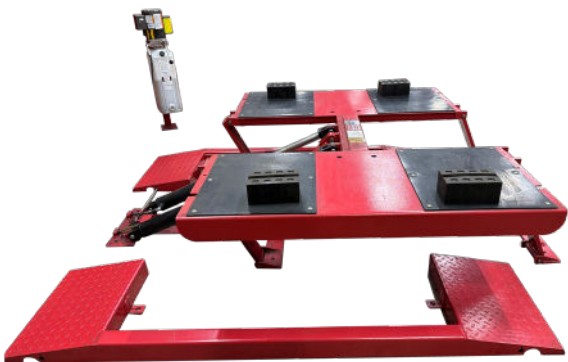

#4TPD10SSR1

10,000 lb Low Rise Cantilever Pad Lift

Cars and Light Trucks

Ideal for quick change and drive thru shops

For tires, brakes, and quick lube

#4TPD10SSR1

6,000 lb Mid Rise Portable Lift

Tires, Brakes, Detailing

Whether it's hobby or commercial use, this portable lift ignites new opportunities for conducting various types of services. We include multiple adapters to enhance, as well as add safety and performance features.

USA Made Bucher Pump for Maximum Lifting Power

- Large, barrel wheels for easy rolling on multiple floor types
- Twin hydraulic cylinders for smooth raising and lowering
- Double baked with a powder coated finish



For Cars



For Light Trucks



#4TLM6R1 (110V, 1HP)

#4TLM6R4 (220V, 2HP)

Fail-Safe Features

7 auto-engaging locks keep technicians safe.



Included Adapters

Sliding height adapters 1 1/2", 2 1/4", and 5 3/4" (38, 57, 146 mm) with rubber contact pads.

Compact Footprint

40" x 99 3/4" footprint to fit any shop layouts.




Bicycle Style Lock Release

Mechanical lock release hand grip is positioned away from the lift for safety and ease of use.

Underbody Access

Lift up to 55 1/2" with use of adapters for improved visibility.

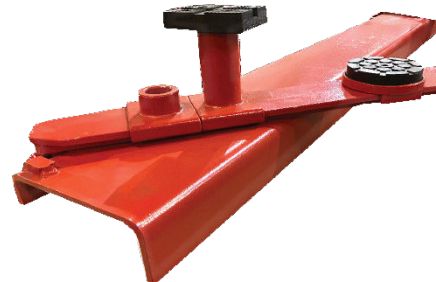

Extra Long Arms

27" swing arms let you reach more car and truck lifting points.

6,600 lb Mid Rise Scissor Lift

Tires, Brakes, Body Repair, Quick Lube

Designed for shops with high cycle counts, this lift has many features to keep your shop productive. This lift provides you increased access to the undersides of vehicles easily.

Open front, rear, and center, with no obstructions between lifting decks

- Complete vehicle access with no tie bars or torsion rods obstructing
- 78 3/4" x 86 1/2" footprint
- Double baked with a powder coated finish



For Cars



For Light Trucks

Flush or Surface Mount

Choose between the low profile ramps of the surface mount or the flush mount to fit your desired bay configuration.



Volumetric Control

Single cylinder with dual chamber design keeps the lift level.

Less Maintenance

Extra large pins with accessible grease fittings for optimal performance.



Multiple Locking Positions

5 locking positions ensure side to side stability and safety for technicians.

Vehicle Versatility

Pull out extensions can accommodate short and long vehicle wheelbases.



Optional Light Truck Frame Adapter

Adapter comes with 2 traverse beams and 4 lifting pads (#4TS10SR1TBA4).

10,000 lb Dual Scissor Lift

Tires, Brakes, Body Repair, Quick Lube

Larger capacity scissor lift with an economically designed footprint for your layout. Increasing your capacity equips your shop to service more vehicle types.

Designed for Drive-Thru and Quick Change Shop

- Lift reaches a raised height of 79" with twin hydraulic cylinders
- Efficiently engineered with an 81.9" width
- Double baked with a powder coated finish



#4TS10SSOR1FM (Flush)



For Cars



For Light Trucks

Unobstructed Access

Open front and rear with no tire bars or torsion rods allowing increased access to many vehicles.



Surface or Flush Mount

Choose between the low profile ramps of the surface mount or the flush mount to fit your desired bay configuration.

Less Maintenance

Extra large pins with accessible grease fittings for optimal performance.



Secure by Design

Steel plate lifting legs, stainless steel hinge pins, and 21 mechanical locking positions ensure side to side stability.

Low Profile Approach Ramps

Clear accessibility for smaller compact cars while still allowing for heavier vehicles to be serviced.



Optional Light Truck Frame Adapter

Adapter comes with 2 traverse beams and 4 lifting pads (#4TS10SR1TBA4).

10,000 lb Low Rise Cantilever Pad Lift

Quick Change and Drive Thru Shops


The Coats low rise pad lift's small footprint lets you truly maximize shop space. Its drive thru design keeps the work in your shop flowing.



#4TPD10SSR1
(220V model)

Efficient Lifting Power For More Uptime And Less Maintenance

- Rugged, twin hydraulic cylinders for ultimate durability and smooth lifting
- Anti-corrosion frame with powder coat finish
- Comes with USA made Bucher Pump. 220V model 4TPD10SSR1 or 110V model 4TPD10SSR4

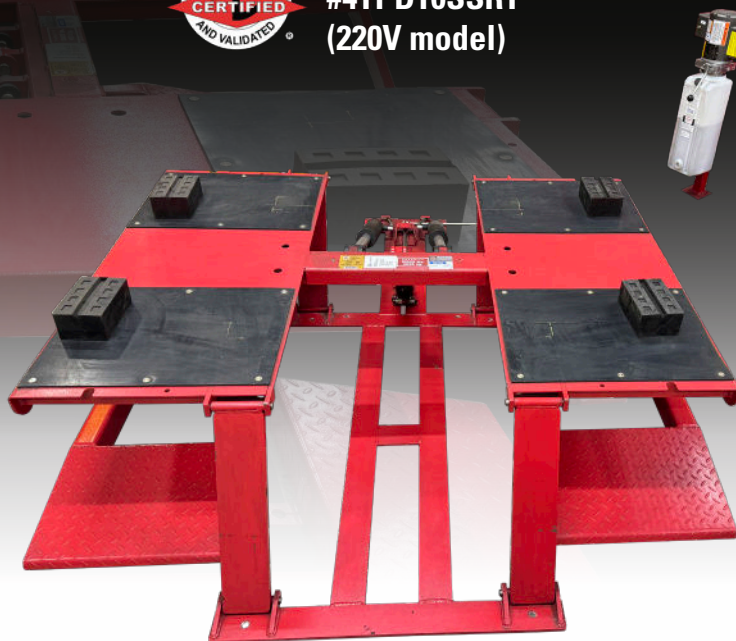

For Cars



For Light Trucks

INCLUDED!



Low Pads 1 1/2" Set

#4TPDB4 (Set of 4)
#4T17106205 (Individual Pad)

INCLUDED!



Medium Pads 3" Set

#4TPDRB4 (Set of 4)
#4T17106203 (Individual Pad)



Optional Truck Pads Set

#4TPDTA4 (Set of 4)
#4T47102700 (Individual Pad)
Truck Pads are not included with the lift.

Compact Footprint

With overall dimensions 78 1/2" x 92 1/2." Lifts to 21.4" and collapses to 4" for a true, low rise, space saving solution

Lift With Pads


When working on vehicles with higher frames, you can protect customer vehicles by using the right sized pads to lift without damage.

Convenience

Made available with auto engaging mechanical locks and a mechanical lock foot release on either side.


SPECIFICATIONS

	6K Mid Rise Portable Scissor Lift
Capacity	6,000 lb / 2.7T
Overall Dimensions (W x L)	40" x 99 3/4" (1,016mm x 2,533mm)
Frame Dimensions (W x L)	40" x 71 1/2" (1,016mm x 1,816mm)
Drive Over Height	5 3/4" (140 mm)
Overall Lifting Height	54" and 55 1/2" with adapters (1,371mm and 1,409mm)
Number of Mechanical Locks	7
Lock Release	Motorcycle Hand Grip
Finish	Double bake powder coat
Included Height Adapters	1 1/2," 2 1/4," 5 3/4" Drop In Stacking Adapters (38mm, 57mm, 146mm)
Swing Arms	4"-27" (685mm)
Arm Reach Front to Back	15 3/4" - 65 1/4" (400mm - 1,657mm)
Arm Reach Side to Side	42" - 66 1/2" (1,067mm - 1,689mm)
Power Supply	110V 15 amp, 1ph 220V 15 amp, 1ph
Lifting Time	30 seconds
Shipping Weight	800 lb / 362 kg
Part Number	4TLM6R1 (220V) 4TLM6R4 (110V)

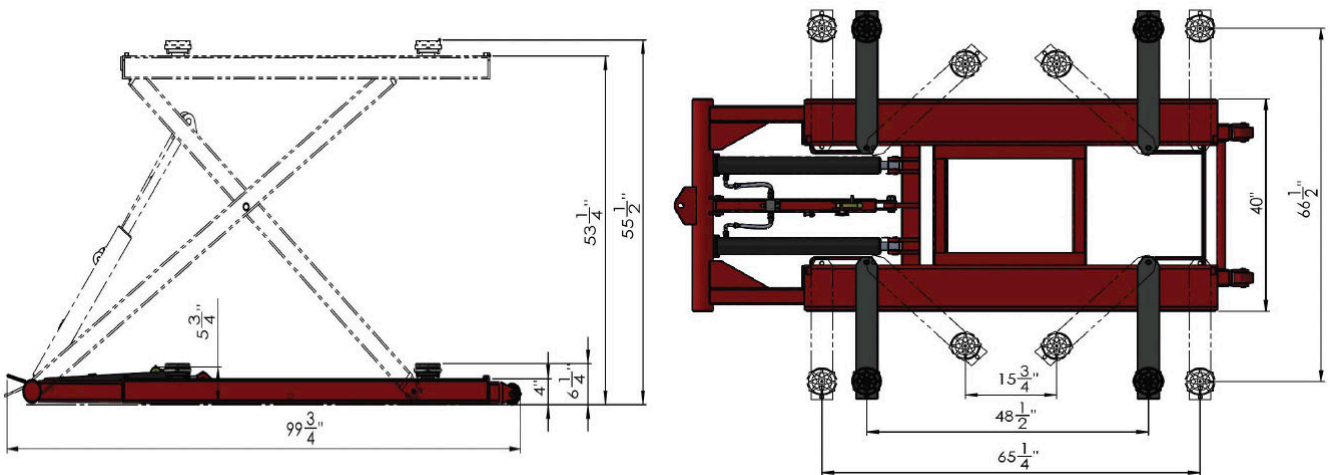





SPECIFICATIONS

	6.6K Mid Rise Scissor Lift
Capacity	6,600 lb / 3.0T
Overall Dimensions (W x L)	78 3/4" x 86 1/2" (2,000mm x 2,200mm)
Lifting Pad Dimensions (W x L)	23 1/2" x 61" to 82 1/2"(Extended) (597mm x 1,550 to 2,100 mm)
Drive Over Height	4 1/8" (105mm)
Overall Lifting Height	39 3/8" and 42" with adapters (1,000mm x 1,066mm)
Number of Mechanical Locks	5
Lock Release	Air Cylinder Lock Release
Finish	Double baked with a powder coat finish
Height Adapters	4" Rubber Covered Blocks (101mm)
Equalization	Volumetric
Styles	Surface mount or flush mount
Pull Our Deck Extension	Yes
Power Supply	220V - 12 amp; 1ph, 2HP / 1.5kw
Shipping Weight	850 lb / 385 kg
Part Number	4TS6SSOR1

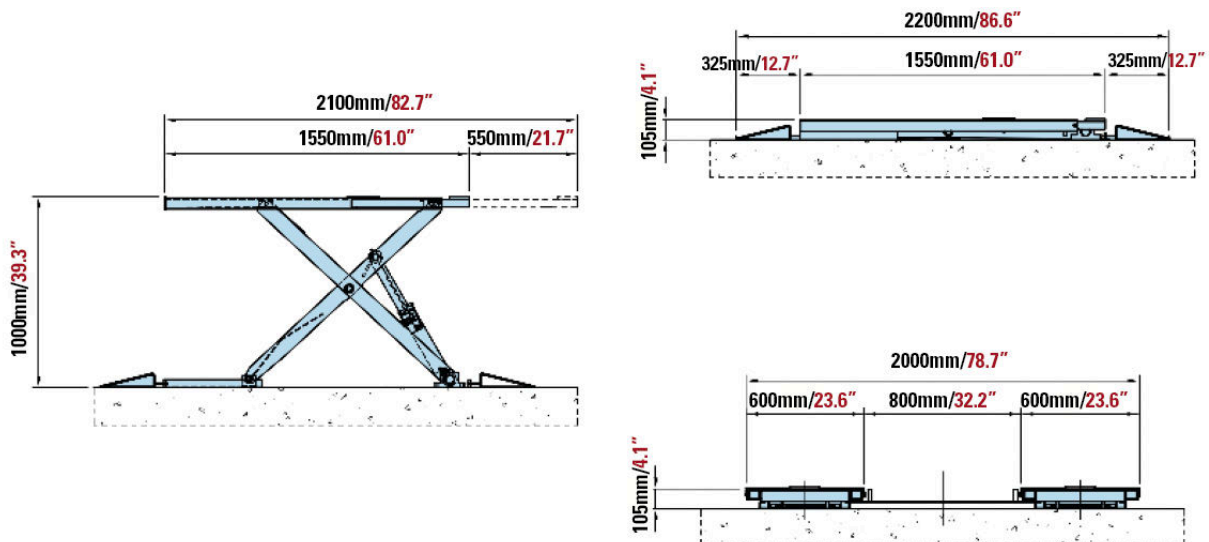

SPECIFICATIONS


	10K Dual Scissor Lift
ALI Certified	Yes
Capacity	10,000 lb / 4.5T
Overall Dimensions (W x L)	Surface Mount: 81.9" x 160" (2,080mm x 4,064mm) Flush Mount: 81.9" x 60" (2,080mm x 1,524mm)
Deck Width	23.8" (605mm)
Width Between Runways	27" - 40" (686mm - 1,016mm)
Lowered Height	8.3" (211mm)
Raised Height	79.5" (2,019mm)
Lifting Time	45 Seconds
Power Requirements	220V - 60Hz - 20 amp - 1ph
Shipping Weight	2,850 lb / 1.3T
Part Number	Flush Mount: 4TS10SSOR1FM

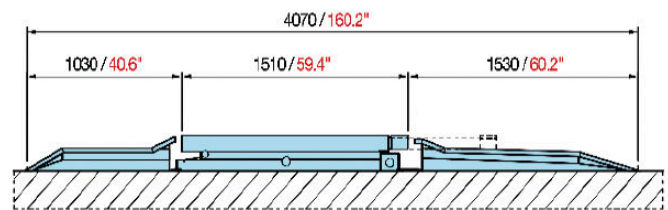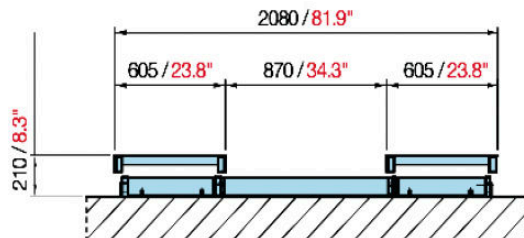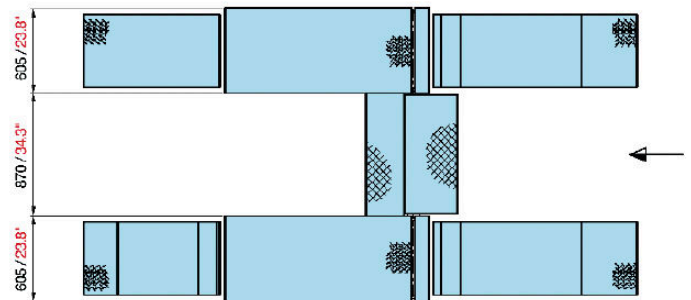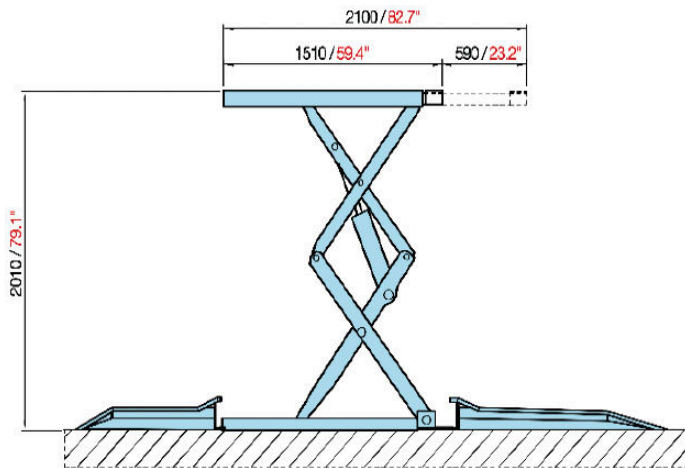

*Diagrams shown are for surface mount model. Flush mount models require pit construction. Detailed pit layout available up on request.

SPECIFICATIONS

	10K Low Rise Cantilever Pad Lift
Capacity	10,000 lbs / 4.5T
ALI Certification	Yes
Overall Dimensions (W x L)	78 1/2" x 92 1/2" (1,994mm x 2,350mm)
Deck Dimensions (W x L)	24" x 51 1/4" (610mm x 1,302mm)
Drive Over Height	4" (102mm)
Overall Lifting Height	21.4" (544mm plus adapters)
Distance Between Lifting Pads	22 3/4" (578mm)
Distance From Lift to Power Unit	127 3/4" (3,245mm)
Frame Dimensions (W x L)	52 1/2" x 78 1/2" (1,016mm x 1,816mm)
Power Supply	220V or 110V
Mechanical Lock Positions	3
Lifting Time	30 seconds
Shipping Weight	866 lbs / 393 kg
Part Number	4TPD10SSR1 (220V model) 4TPD10SSR4 (110V model)

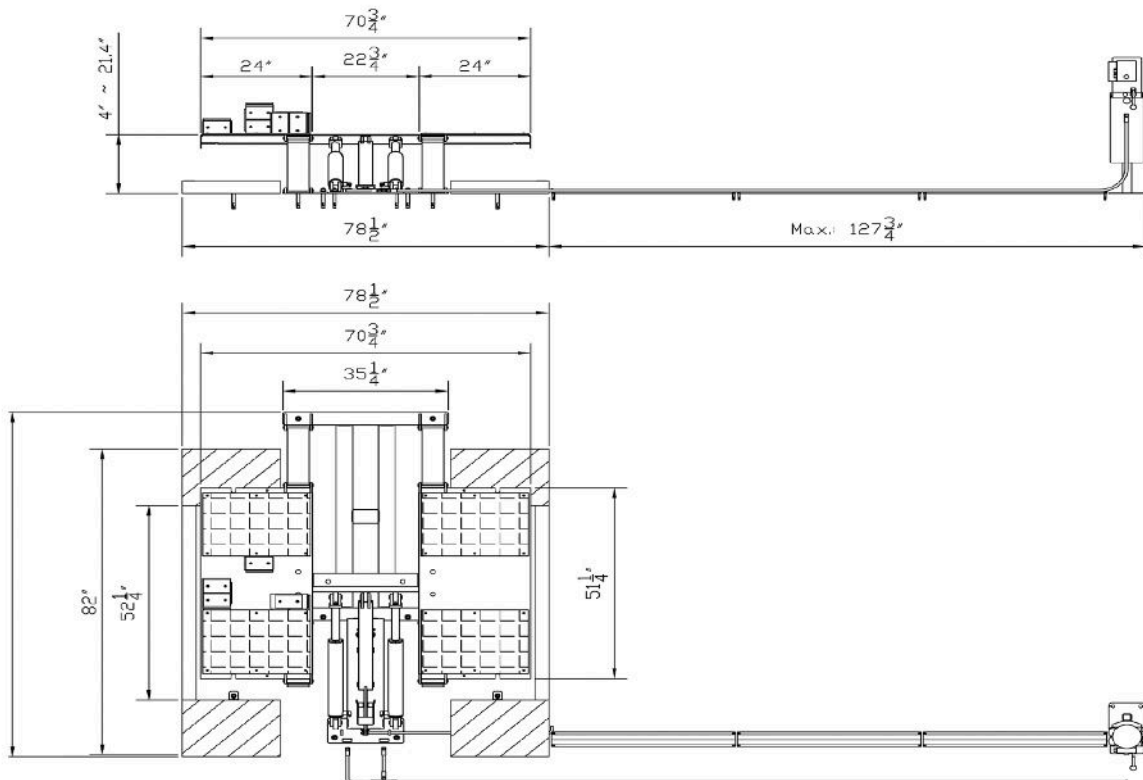

Why Choose Coats Lifts?




ALI Associate Member

Coats distributes ALI-Certified lifts and is an active ALI Associate Member



North American Assembled

Coats uses premium components sourced in the U.S. and abroad.



ALI Lift Inspections

Every Coats Lift Inspector is certified to perform ALI-Lift Inspections for any brand's lift. Book with us today!

(800)-688-6359



coatscompany.com/low-profile-lifts

coats

Contact Us!

www.coatscompany.com/contact/

Sales Inquiries: **855-876-3864**

Customer Service: **800-688-6359**

**1601 J.P. Hennessy Drive
LaVergne, TN 37086**

**2430 Lucknow Drive Unit 9
Mississauga, Ontario
L5S 1V3 Canada**

*Disclaimer: The Coats Company, LLC is constantly updating their products to maintain the highest possible standards of performance and safety. The specifications, descriptions, and photos in this brochure are only accurate at the time of printing and are subject to change with or without notice.